



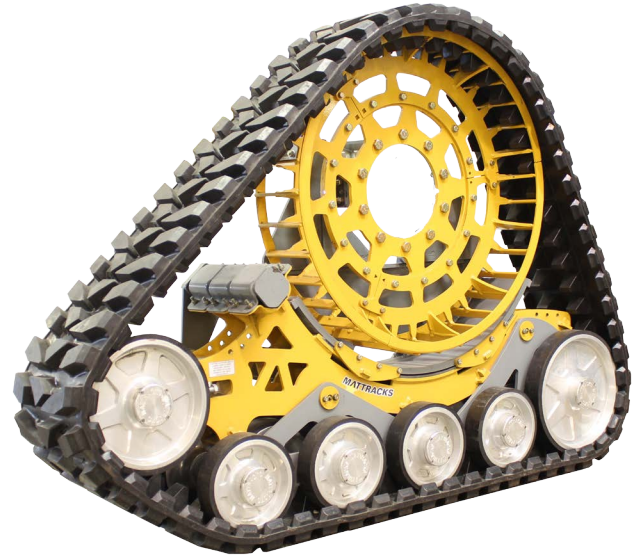

9000 Series

TA9090-AA-1515

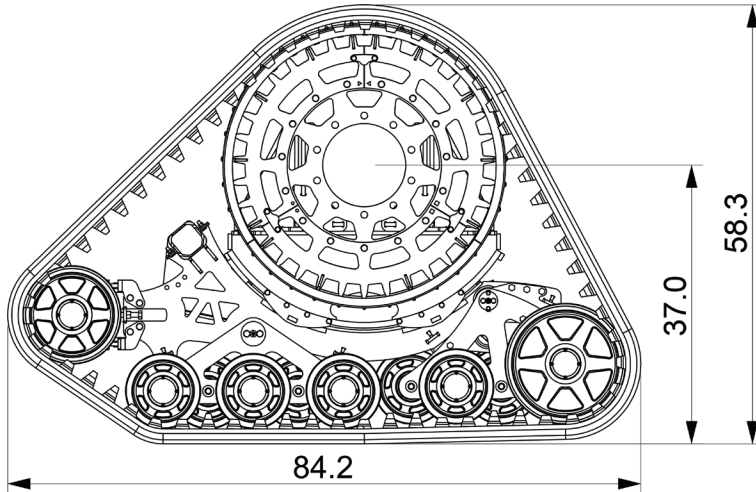

Exclusive Anti-Torque System	Rubber Torsion
Frame Construction	HSLA Steel
Recommended Max Gross per corner	8,750 lbs per corner
Internal Suspension	Concentric Pivot w/Independent Offset Rocker Arm
Track Tread Width	15"
Tread Style	All-Terrain Self-Cleaning
Track Material	Rubber with Internal Composite Rods and Cord
Recommended Operating Temperature	(Ambient) -40°F to +130°F (-40°C to +55°C)
Axle Height	37"
Ground Contact Area (3" Depression)	4,000 in ²
Corners	4
Sprocket Diameter	39"
Wheels (Shielded & Sealed Bearings)	2.5" Wide - (12) 10", (2) 13", (2) 16"
Recommended Max Speed**	20 mph
Turning Radius	Same as original vehicle
Max Operating Side Slope (Grade)*	25%
Terrain	All-Terrain

*DEPENDENT ON VEHICLE, CARGO, AND ACCESSORIES **SOME VEHICLES MAY REQUIRE SLIGHT ALTERATIONS
 ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION



202 Cleveland Ave E · PO Box 214 · Karlstad, MN 56732 · 877.436.7800 · mattracks.com